

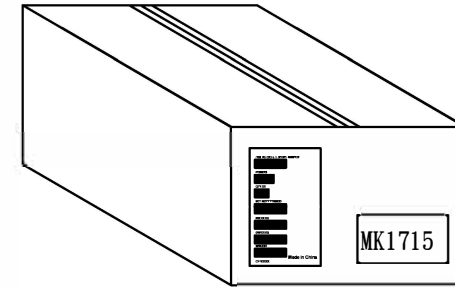
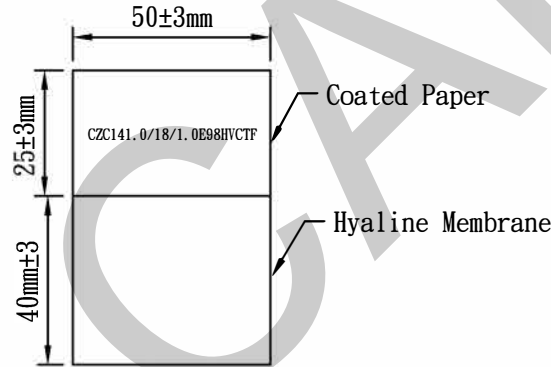



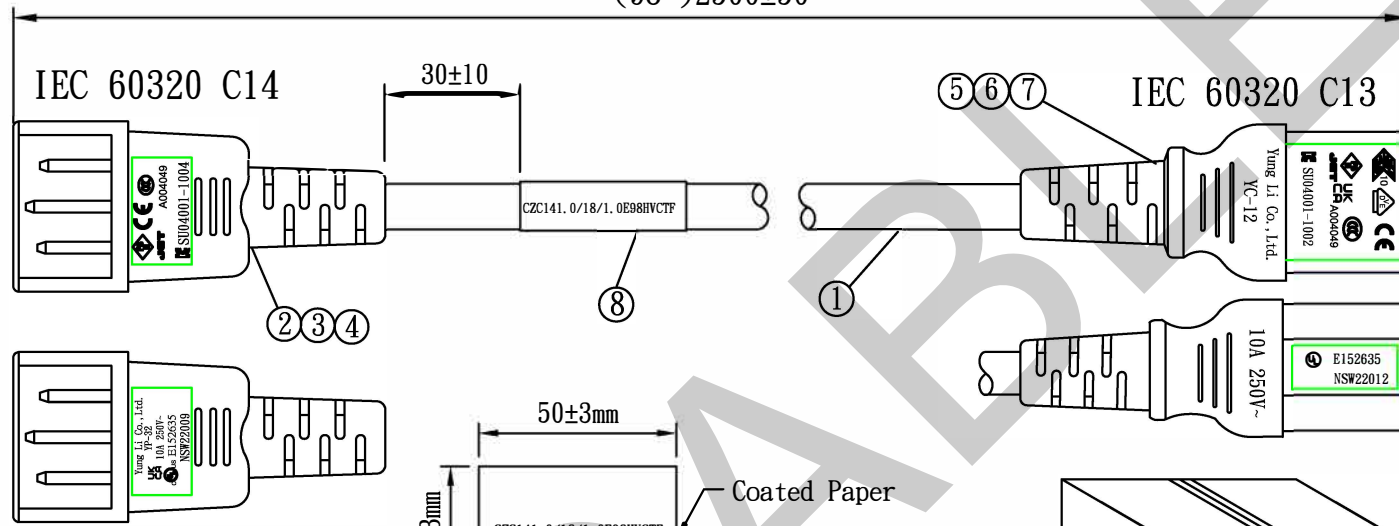


(98") 2500±50



Packing: Bundled to ease installation.

MARKING:

Yung Li Co., Ltd. H05VV-F 3G 1.0mm² <VDE>  SAA-190646-EA  SU01027-4002
 A004049 60227 IEC 53(RVV) 300/500V c(UL)us E241374 SJT 3/C 18AWG(0.824mm²)
 105°C 300V VW-1 <PS>E JET HVCTF 3X1.0mm² **タイネツ** -F-

NO.	SPECIFICATION	QTY	REMARK
1	PSE HVCTF 1.0/3C+H05VV-F 1.0/3C+SJT 18/3C 105°C BLACK	1PC	
2	YP-32 PVC PLASTIC:50P	15g/PC	
3	TER:98672BS-1	3PCS	
4	INNER BODY: 2X4 BLACK	1PC	
5	TER:97740	3PCS	
6	YC-12 INNER BODY	1PC	
7	YC-12 PVC PLASTIC:50P BLACK	18g/PC	
8	LABEL: (40+25)*50mm	1PC	

Tolerance	Approved	Date		MK Cable			
	>0±0.30	Checked	Date				
>1.0±0.50	Drawn	SUKI	Date	23.03.02	MODEL #	CZC14.1.0/18/1.0E98HVCTF	
>10.0±1.0	Cat. No.	YP-32/YC-12			ITEM #	MK1715	
>20.0±2.0	Drawing No.	CY-V3425		Rev.	B	Material	P.V.C
Angle: ±1°						Unit	mm
						Scale	